



ARENA 20

Frequency Response

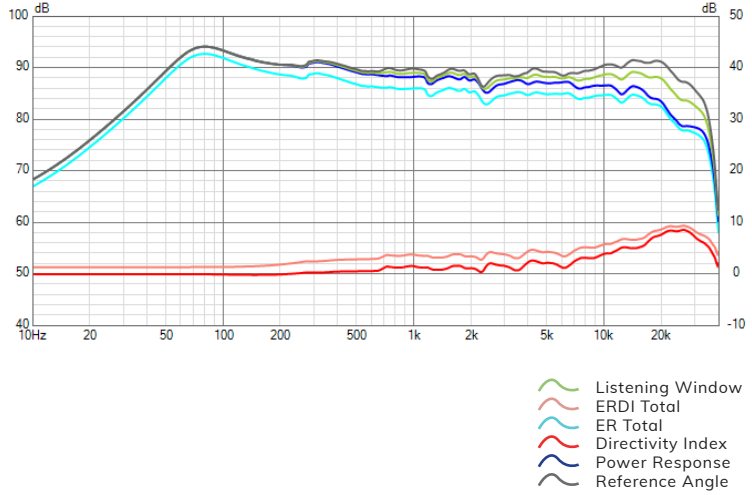

Impedance Amplitude and Phase

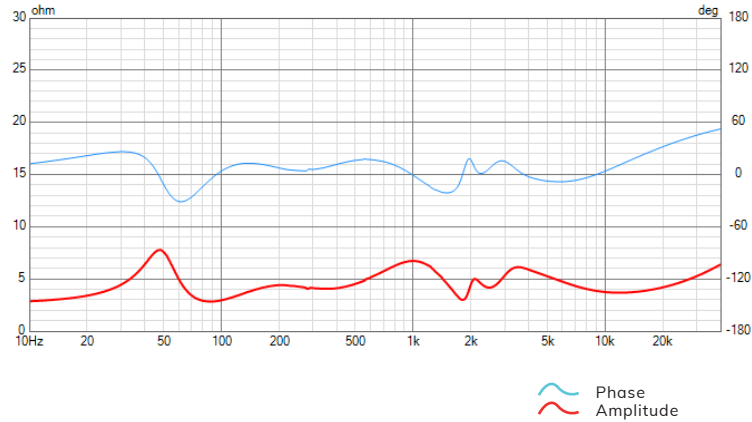


Arena 20, the 3.5 way speaker boasts the renowned Voice of Sonus faber, adding a solid solution to Arena 30.





Horizontal Contour Plot (normalized)

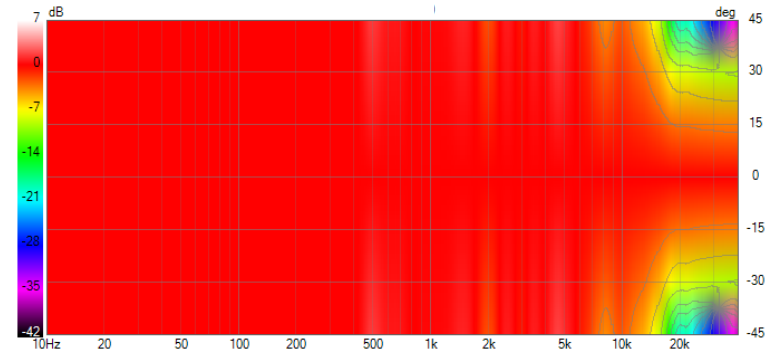

Technical Specifications

Speaker type	3,5 way	
Low frequency transducer	2 x 8 in	
Mid/High frequency transducer	1 x 6,25 in 19 mm Dome Tw	
Maximum recommended power	400 W	
Low-frequency cut-off (-6dB)	55 Hz	31.500 Hz
Frequency Response (-3dB on-axis)	60 Hz	24.710 Hz
Max SPL 1 Meter	117 dB	
Sensitivity 2.83 Vrms@1m	92,00 dB	
Nominal Impedance	4 Ω	
Minimal impedance	3,16 Ω	
Crossover frequencies	160 Hz / 220 Hz / 3100 Hz	
Enclosure type	Closed Box	
Mounting Depth	144 mm - 5,7 in	
Weight	47,2 kg - 104,1 lb	
Depth	150 mm - 5,9 in	
Width	321 mm - 12,6 in	
Height	1.577 mm - 62,1 in	

Time Spectral Decay

