

## Initial Set-up

1. Connect the power cord.
2. Switch on the mains power.
3. Press the Standby button.
4. Using the front panel rotary control, select the input marked 'NET' for network streaming

## Network Connection

### Ethernet (Recommended)

1. Connect an Ethernet cable from your router to the LAN port on the rear of the LEAK TruStream.
2. Power on the unit and select 'NET' using the front panel rotary control.
3. The NET LED will illuminate solid orange once connected.
4. Ensure your smartphone or tablet is connected to the same network.

### Wi-Fi Connection Options


#### WPS

1. Press the WPS button located on the rear of the TruStream.
2. Within 60 seconds, press the WPS button on your router.
3. The Source LED will blink rapidly, then illuminate solid white when successfully connected.


If pairing is unsuccessful, try reversing the button order or repeat the steps.

#### Access Point (AP Mode)


1. Press and hold the WPS button on the rear of the TruStream for approximately 6 seconds.
2. The LED will blink slowly, then rapidly — indicating Wi-Fi setup is in progress.
3. On your smartphone or tablet, connect to the temporary Wi-Fi network named TruStream-XXXX.
4. Launch the LEAK TruStream app and select Wi-Fi Setup.
5. Choose your home Wi-Fi network, enter the password, and press OK.
6. The LED will turn solid white when connected successfully.

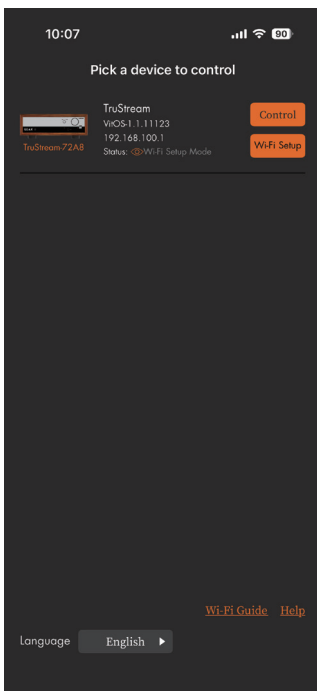


Click Wi-Fi Setup

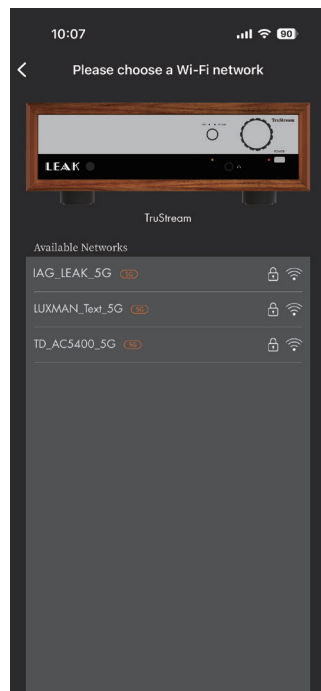

Pick your Wi-Fi

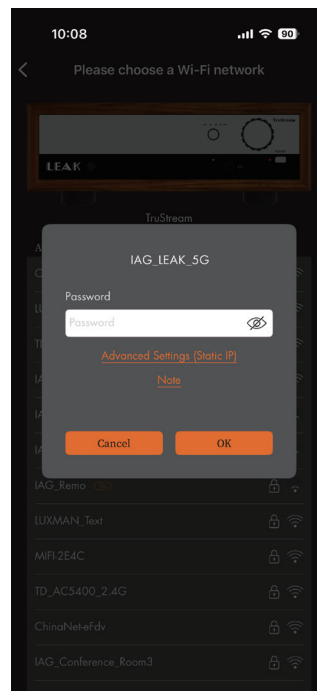

Entering Password

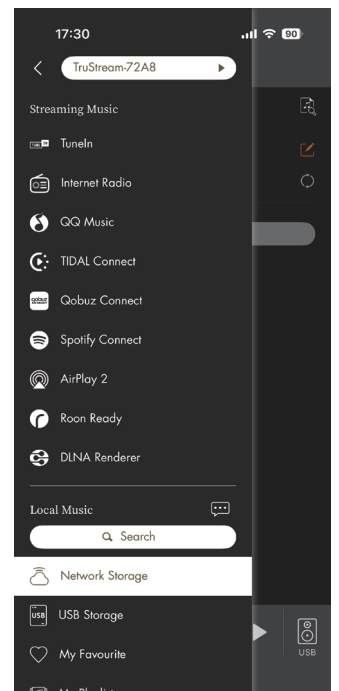

Ready to use

Please download and install the LEAK TruStream application from either the Apple App Store or Google Play Store by scanning the QR code.

